


IWF71



Characteristics

Optics

- Toughened Glass
- Polycarbonate Lens
- High transmission 78%
- Non-Removable

Thermal Interface Material

- High thermal conductivity
- Excellent heat transfer

Heat sink

- Aluminium - powder coated
- Excellent thermal conductivity

LED Driver

- Rated Supply: 240V AC, 50/60Hz
- PF > 0.95, THD <10%,
- Short circuit, open circuit,

Standards Compliance

- IS 10322
- IS 15885 (Part 2/Sec 13)
- EN 61000-3-2, Harmonics Current
- EN 61000-3-3, Voltage Fluctuations, Flicker
- EN 61000-4-5, Surge Immunity
- EN 61547, EMC

Mounting

- U Clamp

Installation

- Easy installation

Weight

- 9.0 Kg

Cable Entry

- 1 Nos.

Features

- Excellent CRI for actual colour reproduction.
- Energy saving efficiency and low heat produce.
- AL die-cast housing for excellent heat management.
- Quick installation, special design,
- Highly reliable professional design.

Applications

- Industry Circumference, Brand Logo Highlight,
- Border Security, Light Beacon,
- Search Light,



- 200W
- 80 lm/W (±5%)
- 5700K / 3000K
- >70
- PC Lens – 3~5°
- 90-305V AC, 50Hz
- Inventronics
- In-Built, Surge DM 6Kv CM 10Kv
- Non dimmable
- SMD, Lumiled / Seoul / Bridgelux, SDCM <3
- Ta: 0°C to 45°C
- Lifespan >50000h @ L70 B50

Housing Color



Powder Coated – Grey (RAL 7024)


Distribution Curve

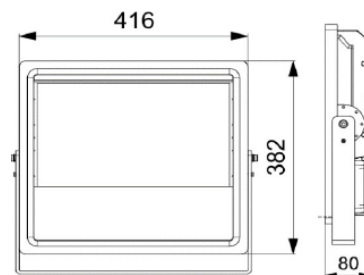

Product Code

Product Code	System Power (W)	System Lumen (Lm)	CRI (Ra)	Color Temp (CCT)	Body Color	Beam Angle	Diming	Weight (Kg)
IWF71-200SU757GPNXX	200	16000	70	5700K	Grey	3~5°	Non-Dim	9.0

Custom Order



Accessories

